


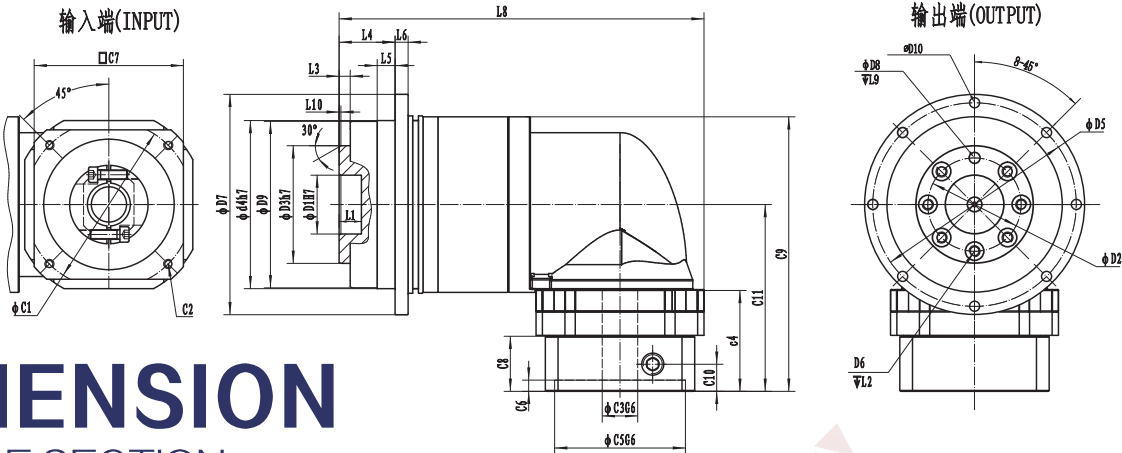

DIMENSION

DOUBLE SECTION

● 尺寸（双节，减速比i=25~200）/Dimension(double stage,Ratio i=25~200)

尺寸/Dimension	MADR064	MADR090	MADR110	MADR140
D1H7	20	31.5	40	50
D2	31.5	50	63	80
D3h7	40	63	80	100
D4h7	64	90	110	140
D5	79	109	135	168
D6	7×M5	7×M6	11×M6	11×M8
D7	86	118	145	179
D8H7	5	6	6	8
D9	63.2	89.2	109.2	139.2
D10	8×4.5	8×5.5	8×5.5	12×6.6
L1	8	12	12	12
L2	9	12	15	17
L3	3	6	6	6
L4	19.5	30	29	38
L5	7	10	10	14.6
L6	4	7	8	10
L8	146.5	195.5	219.5	325.5
L9	6	7	7	7
L10	0.5	1	1	1
C1	70	90	145	200
C2	4×M4	4×M5	4×M8	4×M12
C3G6	≤14	≤19/≤24	≤24	≤35/≤42
C4	35	54	67	81
C5G6	50	70	110	114.3
C6	3.5	6	11.5	19
C7	60	80	130	180
C8	24.2	29.5	42.5	57
C9	104.5	147	160	250.5
C10	9.5	14.5	27	32
C11	70	100	113	175.5




MVRBR

Series planetary gearbox
系列行星减速机

PRODUCT FEATURESS


产品特点

- ☆ 行星臂架与输出轴采用一体式结构设计，确保最大的扭转刚性。
- ☆ 行星轮采用满滚针设计，增加接触面积以提高结构刚性与输出扭矩。
- ☆ 齿轮采用低碳钢表面渗碳淬火到HRC62，以获得最佳的耐磨及冲击韧性。
- ☆ 齿形引用国外进口软件辅助设计，以获得最佳的齿形降低噪音。
- ☆ 输入端与马达轴连接采用双边抱紧方式，以获取最大的夹紧力和零背隙的动力传递。
- ☆ 采用蜗线伞齿轮设计，容许输出扭矩高、比直伞齿轮高30%以上。
- ☆ 高容许输入转速，比直伞齿轮输入高8倍以上。
- ☆ 蜗线伞齿轮的啮合齿印，经最佳优化设计，接触齿面负载均一，运转寿命长。
- ☆ 蜗线伞齿轮啮合，经最佳运动误差分析与严格的制程控制，以确保高精度的运转背隙。
- ☆ Planetary boom and output shaft are intergrated structure designed to ensure maximum torsional rigidity.
- ☆ Planetary wheel with full needle design,increase the contact area to improve the rigidity and output torque.
- ☆ The gears are carburized and quenched to the HRC62 with low carbon steel surface for optimum wear and impact toughness.
- ☆ Gears refer to foreign imported software-assisted design to obtain the best tooth shape to reduce noise.
- ☆ The input terminal is connected to the motor shaft in a double-tight manner to obtain the maximum clamping force and zero backlash power transmission.
- ☆ Adopt spiral bevel gear design, allow high output torque, more than 30% higher than straight bevel gear.
- ☆ High tolerance input speed, more than 8 times higher than straight bevel gear input.
- ☆ The meshing tooth imprint of spiral bevel gear has been optimized by optimum design, and the contact tooth surface load is uniform, and long running life.
- ☆ Cochlear bevel gears are meshed by optimum motion error analysis and strict process control to ensure high precision running back clearance.

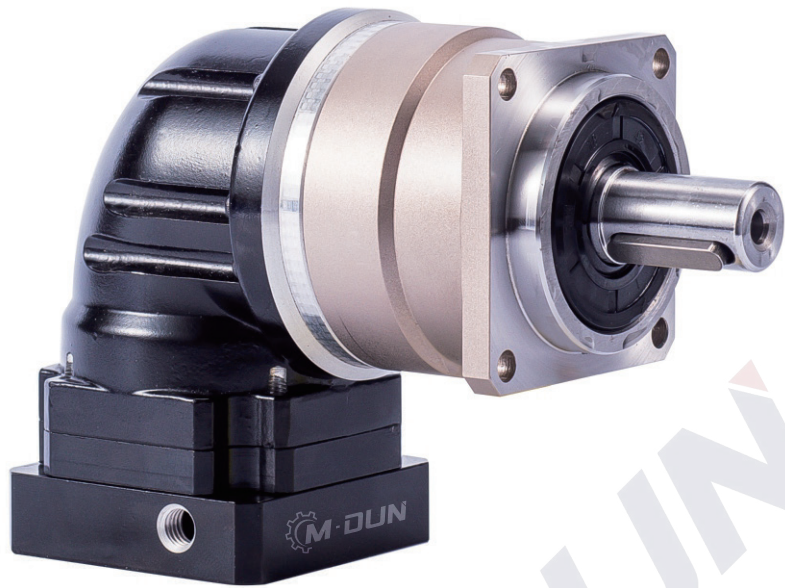

INDICATION FOR MODEL
SELECTION

机种型号表示

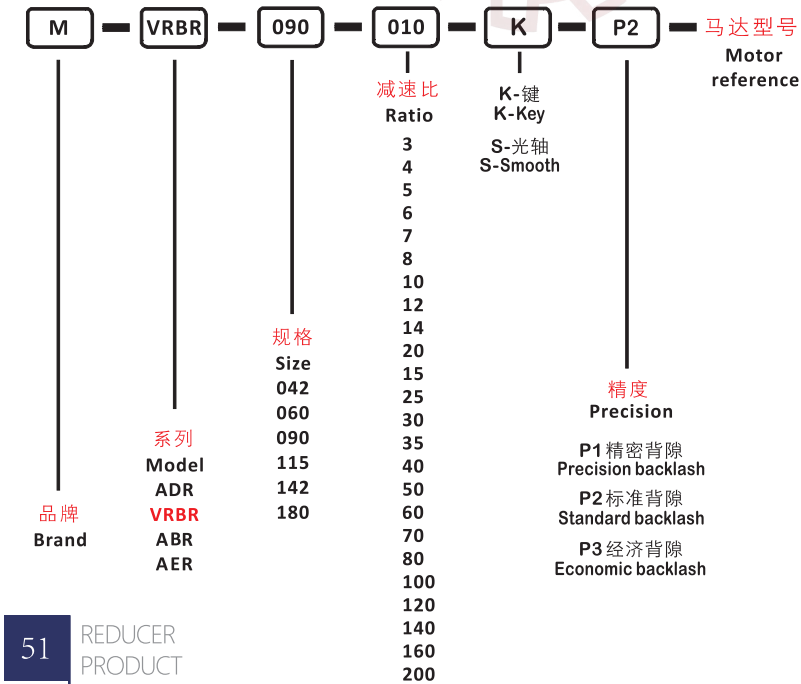

GENERAL NOTICES

订货须知


- 机种、型号、扭矩
- 减速比或出力轴转速
- 工况及连接方式
- 数量及安装的机械名称
- 入力方式和入力转速
- 马达厂牌型号或法兰及马达轴尺寸
- Type, model and torque
- Ratio or output speed
- Working conditions and connection methods
- Quantity and installed machine name
- Input mode and input speed
- Motor brand model or flange and motor shaft size

减速机性能资料/Performance

规格 Specification	单位 Unit	节数 Stage	减速比 Ratio	MVRBR042	MVRBR060	MVRBR090	MVRBR115	MVRBR140	MVRBR180
额定输出力矩 Rated output torque T _{2N}	Nm	1	3	9	36	90	195	342	588
			4	12	48	120	260	520	1040
			5	15	60	150	325	650	1200
			6	18	55	150	310	600	1100
			7	19	50	140	300	550	1100
			8	17	50	140	260	542	1050
			10	14	60	160	330	650	1200
			12	18	55	150	310	600	1100
			14	19	50	140	300	550	1100
			20	14	40	100	230	450	900
		2	15	15	55	130	208	342	588
			25	15	60	150	325	650	1200
			30	20	55	150	310	600	1100
			35	19	50	140	300	550	1100
			40	17	50	140	290	542	1050
			50	14	60	160	330	650	1200
			60	14	55	150	310	600	1100
			70	20	50	140	300	550	1100
			80	19	50	140	290	542	1050
			100	17	60	160	330	650	1200
急停扭矩/Emergency stop torque T _{2NOT}	Nm	1,2	3~200	三倍额定输出力矩/Triple rated output torque					
额定输入转速/Rated input speed N _{1N}	rpm	1,2	3~200	5000	5000	4000	4000	3000	3000
最大输入转速/Maximum input speed N _{1B}	rpm	1,2	3~200	10000	10000	8000	8000	6000	6000
精密背隙/Precision backlash P1*	arcmin	1	3~20	≤4	≤4	≤4	≤4	≤4	≤4
		2	15~200	≤7	≤7	≤7	≤7	≤7	≤7
标准背隙/Standard backlash P2*	arcmin	1	3~20	≤6	≤6	≤6	≤6	≤6	≤6
		2	15~200	≤9	≤9	≤9	≤9	≤9	≤9
经济背隙/Economic backlash P3	arcmin	1	3~20	≤8	≤8	≤8	≤8	≤8	≤8
		2	15~200	≤12	≤12	≤12	≤12	≤12	≤12
扭转刚性/Torsional rigidity	Nm/arcmin	1,2	3~200	3	7	14	25	50	145
容许径向力/Allowable radial force F _{2aB}	N	1,2	3~200	780	1530	3250	6700	9400	14500
容许轴向力/Allowable axial force F _{2aB}	N	1,2	3~200	390	765	1625	3350	4700	7250
使用寿命/Lifespan	hr	1,2	3~200	20000 *					
效率/Efficiency	%	1	3~20	95%					
		2	25~200	92%					
重量/Weight	kg	1	3~20	0.9	2.1	6.4	13	24.5	51
		2	25~200	1.2	1.5	7.8	14.2	27.5	54
使用温度/Working temperature	°C	1,2	3~200	(-10° C +90° C)					
润滑/Lubricating				合成润滑脂/Synthetic lubricating grease					
防护等级/IP Grade		1,2	3~200	IP65					
安装方向/Installation direction		1,2	3~200	任意方向/In any direction					
噪音值 (n1=3000rpm, 无负载) Noise level (n1=3000rpm, off load)	dB(A)	1,2	3~200	≤61	≤63	≤65	≤68	≤70	≤72

减速机转动惯量/Rotational inertia


规格 Specification	单位 Unit	节数 Stage	减速比 Ratio	MVRBR042	MVRBR060	MVRBR090	MVRBR115	MVRBR140	MVRBR180
转动惯量J1 Rotational inertia J1	kg.cm ²	1	3~10	0.09	0.35	2.25	6.84	23.4	68.9
			12、14	0.035	0.07	1.87	6.25	21.8	65.6
			20	0.03	0.07	1.87	6.25	21.8	65.6
		2	15	0.09	0.35	2.25	6.84	23.4	68.9
			25~100	0.09	0.09	0.35	2.25	6.84	23.4
			120~200	0.007	0.01	0.31	1.87	6.25	21.8

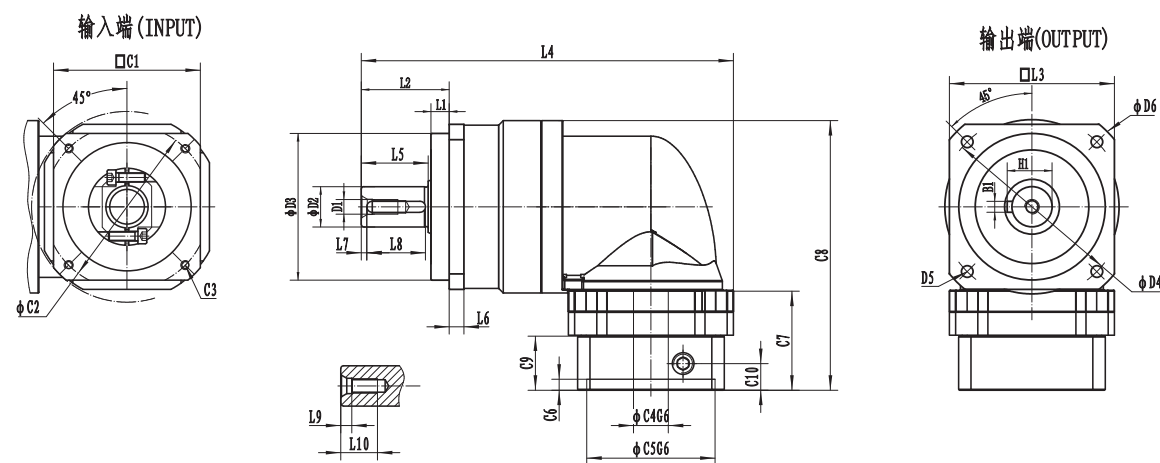

DIMENSION
DOUBLE SECTION

- 尺寸 (单节, 减速比 i=3~20)
Dimension(single stage,Ratio i=3~20)

尺寸/Dimension	MVRBR042	MVRBR060	MVRBR090	MVRBR115	MVRBR140	MVRBR180
D1	-	M5	M8	M12	M16	-
D2 _{j6}	-	16	22	32	40	-
D3 _{g6}	-	50	80	110	130	-
D4	-	70	100	130	165	-
D5	-	4 × φ 5.5	4 × φ 6.6	4 × φ 9	4 × φ 11	-
D6	-	80	116	152	185	-
L1	-	7	10	7	13	-
L2	-	37	48	60	95	-
L3	-	60	90	115	140	-
L4	-	149.5	203	266.5	359	-
L5	-	28.5	36.5	51	79	-
L6	-	6	8	10	12	-
L7	-	3	3	5	5	-
L8	-	25.3	32	40	63	-
L9	-	4	6	10	16	-
L10	-	13	20	28	36	-
C1	-	60	80	130	180	-
C2	-	70	90	145	200	-
C3	-	4 × M4	4 × M5	4 × M8	4 × M12	-
C4 _{G6}	-	14	19	24	35	-
C5 _{G6}	-	50	70	110	114.3	-
C6	-	3.5	6	14	19	-
C7	-	35	54	81	81	-
C8	-	104.5	147	194.5	250.5	-
C9	-	24.2	29.5	45	57	-
C10	-	9.5	14.5	27	32	-
B1	-	5	6	10	12	-
H1	-	18	24.5	35	43	-

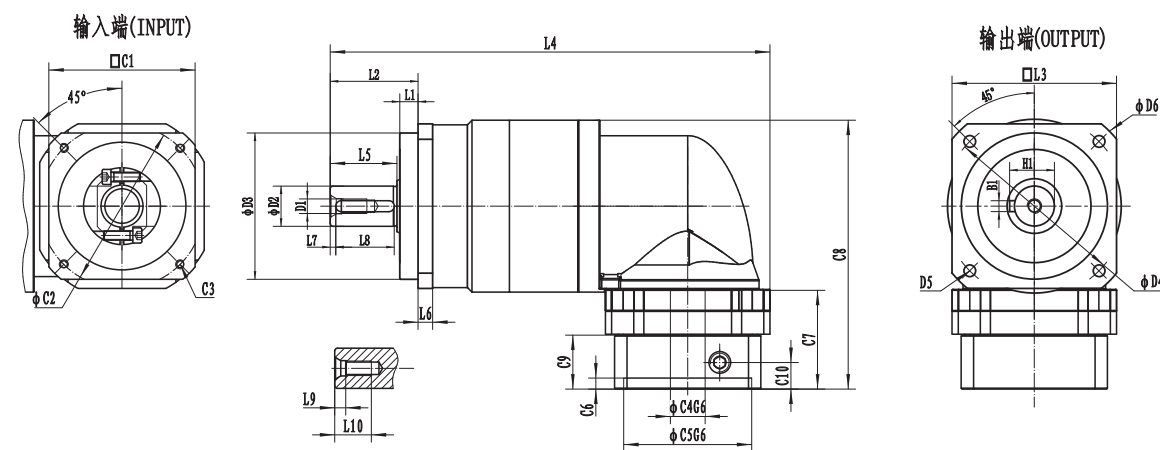

DIMENSION
DOUBLE SECTION

- 尺寸 (双节, 减速比 i=15~200)
Dimension(double stage,Ratio i=15~200)

尺寸/Dimension	MVRBR042	MVRBR060	MVRBR090	MVRBR115	MVRBR140	MVRBR180
D1	-	M5	M8	M12	M16	-
D2	-	16	22	32	40	-
D3	-	50	80	110	130	-
D4	-	70	100	130	165	-
D5	-	4 × φ 5.5	4 × φ 6.6	4 × φ 9	4 × φ 11	-
D6	-	80	116	152	185	-
L1	-	7	10	7	13	-
L2	-	37	48	60	95	-
L3	-	60	90	115	140	-
L4	-	181.5	240.5	290	431	-
L5	-	28.5	36.5	51	79	-
L6	-	6	8	10	12	-
L7	-	3	3	5	5	-
L8	-	25.3	32	40	63	-
L9	-	4	6	10	16	-
L10	-	13	20	28	36	-
C1	-	60	80	130	180	-
C2	-	70	90	145	200	-
C3	-	4 × M4	4 × M5	4 × M8	4 × M12	-
C4 _{G6}	-	14	19	24	35	-
C5 _{G6}	-	50	70	110	114.3	-
C6	-	3.5	6	11.5	19	-
C7	-	35	54	67	81	-
C8	-	104.5	147	175.5	250.5	-
C9	-	24.2	29.5	42.5	57	-
C10	-	9.5	14.5	27	32	-
B1	-	5	6	10	12	-
H1	-	18	24.5	35	43	-